



1394

FWB1GLCPCIE1X10

Industrial 1394b PCI Express card with GOF

IOI's PCI Express adapter with integrated Glass Optical Fiber (GOF) port offers users the ability to connect AVT's high end cameras, especially of the Stingray and Pike series with integrated GOF port, directly to their PC in a very simple way. This solution enables very long distance applications associated with the elimination of common ground problems without the use of external hubs. The card is equipped with a high quality optical transceiver with LCLC receptacles to bridge distances up to 500 m at 800 Mbps with 50 μm /125 μm multimode fiber. PCI Express bandwidth of up to 250 MByte/s ensures low latency transmission of the up to 64 MByte/s of video data at full speed from AVT's 1394b cameras. Two additional 1394 bilingual connectors with screw locking enable the direct connection of 1394b cameras with copper interface. 1394a cameras can also be connected by the use of legacy cables.

Highlights

- Up to 64 MByte/s bus video bandwidth
- B signalling eliminates common ground
- Compliant with IEEE 1394b (2002)
- Backward compatible with IEEE 1394a (2000)
- Up to 800 Mbps @ 500 m cable length @ 850 nm wavelength
- GOF port Class 1 laser safety compliant
- Multimode fiber 50 μm /125 μm up to 500 m or 62.5 μm /125 μm up to 200 m
- Easy plug & play, no driver required
- LED for optical connection on card
- Compatible with all AVT 1394b cameras
- Compatible with all AVT 1394a cameras by the use of legacy cables
- Compatible with all AVT Software Packages
- Power in connector to supply power
- Screw locking for 1394b ports

Technical Specifications

Feature	Description
Adapter type	1394b PCI Express Card with LCLC GOF port
Chipset	Texas Instruments XIO2213B (PCI Express™ TO 1394b OHCI WITH 3-PORT PHY)
Interface	PCI Express, 1 lane 2.5GB/s
Ports	2x 1394 bilingual ¹ , screw locking ² , supplying bus power (max. 1500 mA) per port; 1x Glass Optical Fiber (GOF) port with LCLC receptacles, removable dust protection for unused port ³ . Small form factor Gigabit optical transceiver with vertical cavity surface emitting laser (VCSEL Multimode) @ 850 nm. Supporting S800Beta/ S400Beta/ S200Beta/ S100Beta transfer modes ⁴
Speed	100, 200, 400, 800 Mbps transfer rate
Bandwidth	100/80/64 MByte/s at 800 Mbps (gross/net/video)
# cameras (DMA's)	up to 4 (External hub for more than 3 required)
OS support	Windows 2000 (SP4 or later); XP (SP2 or later), Windows 7, Linux 2.6.x ⁵ or later
Compliance	FCC Class B, CE, RoHS Directive (2002/95/EC), WEEE Directive (2002/96/EC), GOF-transceiver: Class 1 Laser International Safety Standard IEC 825 Compliant
Power	12 V DC, via PCI Express bus power (max. 500 mA); via IDE 4-pin connector (each IEEE 1394 connector up to 1.5A)
Operating temperature	0°C ... 65°C
Dimensions	86.5 mm x 86.36 mm (board, without slot bracket)
External power in	13 V – 32 V DC (IEEE 1394 Bus power)
Options: cables	GOF cables, various lengths and grades; copper cables various lengths, with or without screw locking at both sides, sold separately

¹ Bilingual ports can either operate in 1394b or 1394a, depending on the device (cable) attached.


² Screw locking: Do not apply excessive force in order not to damage port or threads. There remains a gap between the connector and the plug.

³ Dust protection has to be taken off before fiber cable can be connected.

⁴ With a 1394a camera or a computer port connected on the electrical side, the GOF port translates to 1394b language, but a 1394a speed (S400Beta/ S200Beta/ S100Beta), thus enabling long distance application and the elimination of the common ground.

⁵ On request: Contact your local support.

Applications

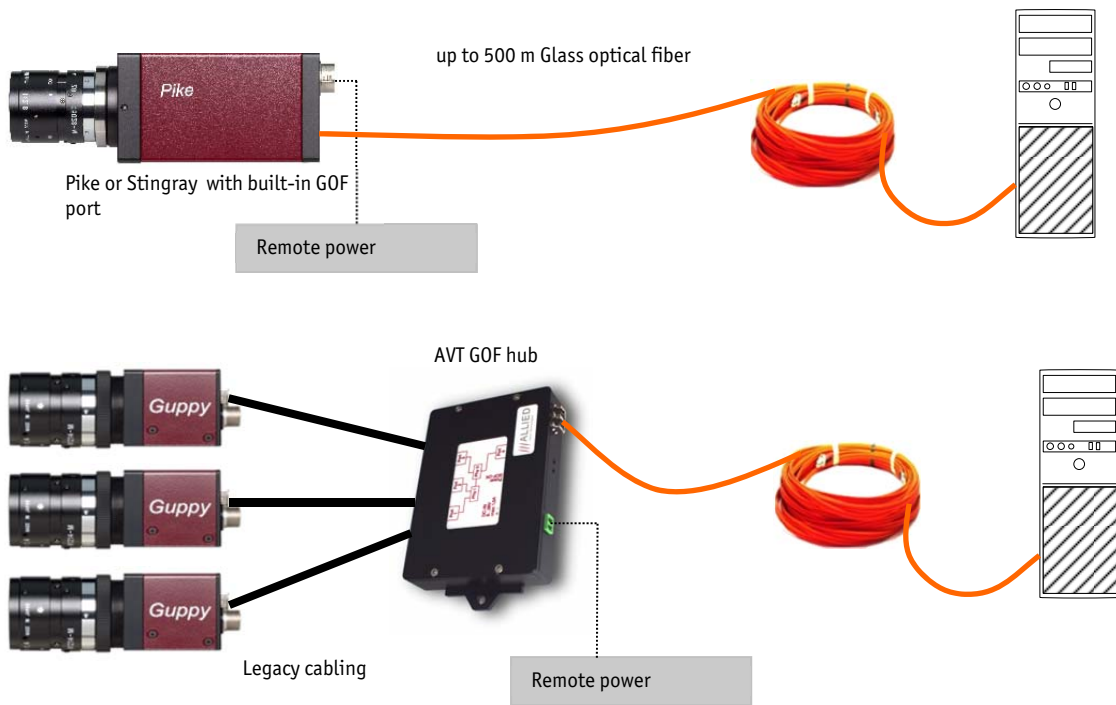

The total video bandwidth of the latter configuration is limited to 32 MByte/s due to the fact that the bus switches to 1394a speed.

Ordering information

Product name	Description	Order number
FWB1GLC-PCIE1X10	2x 1394b & GOF (DUPLEX LC) to PCI-Express Host Adapter, industrial	4161
GOF cable 10 m	62.5/125 µm, LCLC connector, indoor 10 m	K1200095
GOF cable 30 m	62.5/125 µm, LCLC connector, indoor 30 m	K1200087
GOF cable 50 m	62.5/125 µm, LCLC connector, indoor 50 m	K1200085
GOF cable 100 m	62.5/125 µm, LCLC connector, indoor 100 m	K1200086
GOF cable 150 m	62.5/125 µm, LCLC connector, indoor 150 m	K1200088
GOF cable 200 m	62.5/125 µm, LCLC connector, indoor 200 m	K1200185
Cable 0.5 m 9-pin - 9-pin, industrial	IEEE 1394b; 2x screw lock, 0.5 m, black, no ferrite	K1200306
Cable 5.0 m 9-pin - 9-pin, industrial	IEEE 1394b; 2x screw lock, 5.0 m, black, no ferrite	K1200169
Cable 7.5 m 9-pin - 9 pin, industrial	IEEE 1394b; 2x screw lock, 7.5 m, black, no ferrite	K1200308
Cable 4.5 m 9-pin - 6-pin, industrial	IEEE 1394b/a; 9-pin (screw lock) / 6-pin (latch), 4.5 m	K1200171

Notes

Remote power supply needed either at camera or remote device.

Other cable lengths available upon request.