

APPLICATION NOTE

Fixed Pattern Noise Correction on Alvium Cameras

V1.0.0 2020-Mar-04

Scope

This document explains what fixed pattern noise (FPN) is and how the fixed pattern noise correction (FPNC) is calibrated on Alvium cameras.

What is fixed pattern noise?

Some pixels on a sensor produce brighter intensities than the neighboring pixels. This spatial non-uniformity is called fixed pattern noise. It becomes visible on images acquired in the dark. Inaccuracies in the pixel geometry and the sensor electronics create this effect.

FPN is a high-frequency signal overlaying the image signal. It increases with temperature and exposure time. Though non-uniformities can occur on any individual pixel, issues apply typically to columns, due to readout and amplification. Different sensors have individual characteristics. FPN divides into:

Illumination	Defect	Description
Dark image	Dark signal non-uniformity (DSNU)	Spatial variation of the dark signal
Bright image	Photo response non-uniformity (PRNU)	Spatial variation of the sensitivity

Example images

The following images show an ideal image (1), column noise and row noise (2), and pixel noise (3):

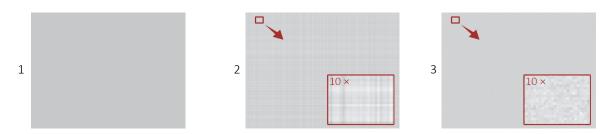


Figure 1: Ideal image and images with noise



How are Alvium cameras calibrated for FPNC?

The FPNC on Alvium cameras strives to correct FPN without damaging image details. All Alvium cameras are factory calibrated using the following workflow. Depending on the dominant FPN of the sensor, either row or column noise is being corrected. The following example relates to columns.

For all calibration steps, numerous images are averaged to compensate for temporal noise. In reality all columns of a sensor are corrected, the example shows the photo response of two averaged columns:





Figure 2: Image before correction with two columns. Black level and slope differ.

1. Dark image: DSNU parameters are calculated.



Change to be applied

Figure 3: DSNU corrected image. Black level has been aligned, slope differs.

- 2. Bright image: PRNU parameters are calculated.
- 3. The corrections align different black levels and slopes.




Figure 4: PRNU corrected image. The columns show equal photo response.



Contact us

Website

General

www.alliedvision.com/en/contact

Distribution partners

www.alliedvision.com/en/about-us/where-we-are

Email

General

info@alliedvision.com

Support

support@alliedvision.com

Sales Offices

Europe, Middle East, and Africa T// +49 36428 677-230

North and South America Toll-free: +1 877 USA 1394

T// +1 978 225 2030

California: +1 408 721 1965

Asia-Pacific T// +65 6634 9027

China T// +86 21 64861133

Headquarters

Allied Vision Technologies GmbH Taschenweg 2a 07646 Stadtroda, Germany T// +49 36428 677-0

F// +49 36428 677-28

Copyright and trademarks

All text, pictures, and graphics are protected by copyright and other laws protecting intellectual property. All content is subject to change without notice. All trademarks, logos, and brands cited in this document are property and/or copyright material of their respective owners. Use of these trademarks, logos, and brands does not imply endorsement.

Copyright © 2020 Allied Vision Technologies GmbH. All rights reserved.